

LOCATION **GOOGLE MAPS**

***, BRIARCLIFF MANOR

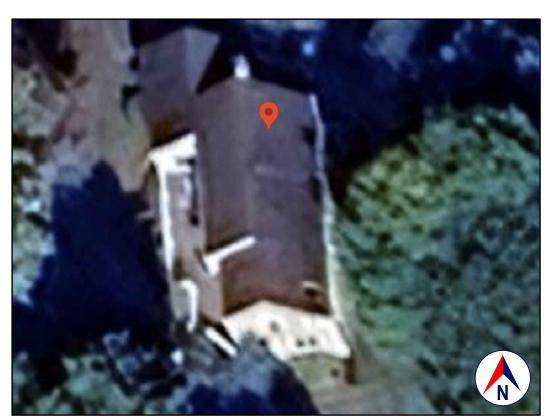

SATELLITE VIEW GOOGLE EARTH

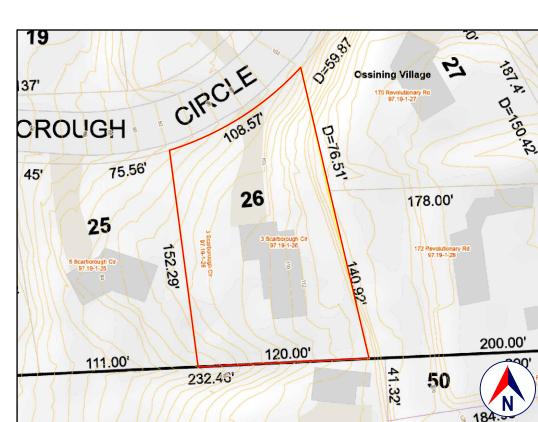

TAX MAP AND TOPO **WESTCHESTER COUNTY GIS**



FRONT VIEW GOOGLE STREET VIEW

THIS DRAWING IS AS A SAMPLE ONLY * PERSONAL (CLIENT) INFORMATION WITHHELD 1.0 GENERAL REQUIREMENTS:

1.1 PROJECT SCOPE: RETROFIT EXISTING FIRST FLOOR STRUCTURE.

1.2 DESIGN INTENT:

THE INVOLVEMENT OF OLIVER ENGINEERING IN THIS PROJECT IS: PROVIDE INSPECTION, DESIGN AND

IT IS THE INTENT OF THESE DRAWINGS TO CALL FOR COMPLETE AND FINISHED WORK, IN COMPLIANCE

WITH THE NOTED CODES, AND TESTED AND GUARANTEED AND READY FOR OPERATION. THE ENGINEER HAS NOT BEEN ENGAGED TO SUPERVISE ANY WORK AND DOES NOT HAVE CONTROL OR CHARGE OF, AND SHALL NOT BE RESPONSIBLE FOR, CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, OR PROCEDURES, FOR SAFETY PRECAUTIONS AND PROGRAMS IN

CONNECTION WITH THE WORK. FOR THE ACTS OR OMISSIONS OF THE CONTRACTOR. SUBCONTRACTOR, OR ANY OTHER PERSONS PERFORMING ANY OF THE WORK, OR FOR THE FAILURE OF ANY OF THEM TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.

THE EXISTING BUILDING, PER THE BUILDING CODE OF NEW YORK STATE, TABLE 601 IS CONSTRUCTION TYPE VB - CONSTRUCTION WHERE THE PRIMARY ELEMENTS ARE NOT REQUIRED TO BE FIRE RATED.

1.4 CLASSIFICATION OF PROPOSED WORK: THIS IS A PROPOSED REPAIR, PER THE EXISTING BUILDING CODE, SECTION 301.2, AND SHALL COMPLY WITH THE PROVISIONS OF CHAPTER 4 OF THAT CODE.

1.5 ZONING, OCCUPANCY AND USE: INSIDE/OUTSIDE:

YEAR BUILT: 1973 (PER ZILLOW) **70NING:** S-125 ONE-FAMILY RESIDENCE OCCUPANCY CLASSIFICATION: RESIDENTIAL GROUP R-3 * EXISTING USE: SINGLE FAMILY SINGLE FAMILY (NO CHANGE) PROPOSED USE

* WHERE THE OCCUPANTS ARE PRIMARILY PERMANENT IN NATURE AND NOT CLASSIFIED AS OCCUPANCY GROUP R-1, R-2, R-4 OR I, INCLUDING BUILDINGS THAT DO NOT CONTAIN MORE THAN TWO DWELLING UNITS.

ALL WORK SHALL BE IN COMPLIANCE WITH THE FOLLOWINGS CODES:

- GENERAL: 2020 RESIDENTIAL CODE OF NEW YORK STATE (INTERNATIONAL RESIDENTIAL CODE 2018 WITH AMENDMENTS)
- EXISTING: EXISTING BUILDING CODE OF NEW YORK STATE (INTERNATIONAL EXISTING BUILDING CODE 2018 WITH AMENDMENTS).
- ENERGY: NOT APPLICABLE TO THESE DRAWINGS.
- PLUMBING: NOT APPLICABLE TO THESE DRAWINGS. ELECTRICAL: NOT APPLICABLE TO THESE DRAWINGS.
- DRAINAGE: NOT APPLICABLE TO THESE DRAWINGS.
- MAINTENANCE: NOT APPLICABLE TO THESE DRAWINGS
- MUNICIPAL: CHAPTER 91, BUILDING CONSTRUCTION OF THE CODE OF THE VILLAGE OF OSSINING.
- OTHER: ALL REFERENCED CODES, OTHER CODES AND REGULATIONS, FEDERAL, STATE AND LOCAL, THAT MAY APPLY.

1.7 AUTHORITY HAVING JURISDICTION:

THE AUTHORITY HAVING JURISDICTION, AS DEFINED IN SECTION 103.1 OF THE RESIDENTIAL CODE, AND WHICH SHALL PROVIDE FOR ADMINISTRATION AND ENFORCEMENT OF THE UNIFORM CODE AND ENERGY CODE BY LOCAL LAW, ORDINANCE, OTHER APPROPRIATE REGULATION, OR COMBINATION THEREOF, IS THE VILLAGE OF OSSINING.

THE DULY APPOINTED BUILDING OFFICIAL OF THE VILLAGE OF OSSINING IS AUTHORIZED TO ENFORCE THE PROVISIONS OF THE CODE.

THE BUILDING OFFICIAL MAY ADOPT POLICIES AND PROCEDURES IN ORDER TO CLARIFY THE APPLICATION OF THE PROVISIONS OF THE CODE. SUCH POLICIES AND PROCEDURES SHALL BE IN COMPLIANCE WITH THE INTENT AND PURPOSE OF THE CODE.

2.0 DESIGN CRITERIA:

2.1 DEAD LOAD:

PER 301.4, THE ACTUAL WEIGHTS OF MATERIALS AND CONSTRUCTION SHALL BE USED FOR DETERMINING DEAD LOAD; THE FOLLOWING APPROXIMATIONS (IN PSF) ARE USED FOR THIS PROJECT: FRAMED WALL ASSEMBLY: ROOF /CEILING ASSEMBLY: FLOOR ASSEMBLY:

ALL OF THE LOADS LISTED MAY NOT APPLY TO THE CURRENT PROJECT.

2.2 LIVE LOAD: UNIFORMLY DISTRIBUTED LIVE LOADS SHALL BE PER TABLE R301.5 AND AS FOLLOWS* (IN PSF): UNINHABITABLE SPACE WITHOUT STORAGE (<42"H, 24"W) UNINHABITABLE ATTICS W/LIMITED STORAGE HABITABLE ATTICS & ATTICS W/FIXED STAIRS: EXTERIOR BALCONIES & DECKS: FIRE ESCAPES: GUARDS & HANDRAILS 200 (CONCENTRATED) **GUARD IN-FILL COMPONENTS:** (HORIZONTAL) (&2,000LB/20SI) PASSENGER VEHICLE GARAGE: ROOMS OTHER THAN SLEEPING ROOMS: SLEEPING ROOMS:

(& 300LB/4SI) ROOF, PER 301.6 (INC. SNOW): *SOME OF THE LOADS LISTED ABOVE MAY BE HIGHER THAN THOSE REQUIRED PER CODE. ALL OF THE LOADS LISTED MAY NOT APPLY TO THE CURRENT PROJECT.

2.3 WIND LOAD:

WIND LOADS SHALL BE BASED ON THE ULTIMATE DESIGN WIND SPEED LISTED IN TABLE 301.2(1) AND ADJUSTED FOR HEIGHT AND EXPOSURE):

120 MPH. WIND LOADS WILL BE ALLOWED FOR IN: THE DESIGN LOAD PERFORMANCE REQUIREMENTS FOR WALL COVERINGS, ROOF COVERINGS, WINDOWS, SKYLIGHTS AND DOORS. COMPONENT AND CLADDING LOADS WILL BE PER TABLE R301.2(2)

2.4 ALLOWABLE LIVE LOAD DEFLECTION:

THE ALLOWABLE LIVE LOAD DEFLECTION OF ALL STRUCTURAL MEMBERS, SHALL BE PER TABLE R301.7 AND AS FOLLOWS: STRUCTURAL MEMBER ALLOWABLE DEFLECTION

RAFTERS HAVING SLOPES GRATER THAN 3:12 WHIT FINISHED CEILING NOT ATTACHED TO RAFTERS L/180 INTERIOR WALLS AND PARTITIONS **FLOORS** CEILING WITH BRITTLE FINISHES (INCLUDING PLASTER AND STUCCO) L/360 L240 CEILING WITH FLEXIBLE FINISHES (INCLUDING GYPSUM BOARD) ALL OTHER STRUCTURAL MEMBERS EXTERIOR WALLS-WIND LOAD WITH PLASTER OR STUCCO FINISHES L/360 EXTERIOR WALLS-WIND LOAD WITH OTHER BRITTLE FINISHES H/240 EXTERIOR WALLS-WIND LOADS WITH FLEXIBLE FINISHES H/120 LINTELS SUPPORTING MASONRY VENEER WALLS

2.5 CLIMATIC AND GEOGRAPHIC CRITERIA:

CLIMATIC AND DESIGN CRITERIA FOR THE VILLAGE OF OSSINING ARE PER TABLE R301.2(1) BELOW:

3.0 CONTRACTOR'S RESPONSIBILITIES:

THE CONTRACTOR SHALL:

• PROVIDE ALL LABOR, MATERIALS AND EQUIPMENT NECESSARY FOR A COMPLETE AND FINISHED

 PROVIDE ALL NECESSARY SHORING AND BRACING FOR ALL BUILDING COMPONENTS IN ORDER TO ADEQUATELY PROTECT AGAINST ANY FAILURES.

OBTAIN AND PAY FOR ALL REQUIRED PERMITS - UNLESS OTHERWISE STIPULATED.

- PRIOR TO THE SUBMISSION OF ANY BID, AND BEFORE PROCEEDING WITH ANY WORK, VISIT THE SITE AND VERIFY AND FAMILIARIZE HIM/HERSELF WITH ALL SITE DIMENSIONS AND CONDITIONS, WITH SITE WORKING CONDITIONS, HOURS OF LEGAL OPERATION, METHODS AND ROUTES OF ACCESS, AND THE EXISTENCE AND EXTENT OF ANY OTHER RESTRICTIONS, AND BE RESPONSIBLE FOR THE VERIFICATION OF ALL SUCH CONDITIONS AND DIMENSIONS WHICH PERTAIN TO THE
- BRING ALL DISCREPANCIES IN CONDITIONS AND DIMENSIONS, BETWEEN THE APPROVED DRAWINGS AND ACTUAL FIELD CONDITIONS, TO THE IMMEDIATE ATTENTION OF THE OWNER, AND RECEIVE DIRECTION IN WRITING, BEFORE PROCEEDING WITH THE AFFECTED WORK.
- VERIFY THE AVAILABILITY, LOCATION LAYOUT AND CONDITION OF UTILITIES, INCLUDING SEWER, WATER, GAS AND ELECTRIC LINES, PRIOR TO THE SUBMISSION OF ANY BID.
- HAVE CONTROL OVER AND SUPERVISE AND DIRECT THE WORK, INCLUDING THAT OF ITS SUBCONTRACTORS, AND BE SOLELY RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES, AND FOR JOBSITE SAFETY, AND FOR COORDINATING ALL PORTIONS OF THE WORK UNDER THE CONTRACT.
- PRIOR TO THE COMMENCEMENT OF ANY WORK, VERIFY THE CONDITION OF ALL ADJOINING STRUCTURES WHICH MAY BE AFFECTED, AND PROVIDE ADEQUATE PROTECTION TO ANY STRUCTURE THAT MIGHT BE OTHERWISE AFFECTED.
- IN THE EVENT THAT DAMAGE IS CAUSED TO ANY STRUCTURE, FINISH, OR OTHER ELEMENT, RESTORE SUCH ELEMENTS TO THEIR ORIGINAL CONDITION.
- IF APPLICABLE, PROVIDE WEATHER PROTECTION, IN AN EFFECTIVE AND TIMELY MANNER, TO
- PROTECT THE PREMISES, PERSONNEL, MATERIALS AND INSTALLED WORK. BE A HOME IMPROVEMENT CONTRACTOR WITH A CURRENT LICENSE ISSUED BY THE
- WESTCHESTER COUNTY DEPARTMENT OF CONSUMER AFFAIRS. • BE CERTIFIED AS A LEAD SAFE FIRM BY THE EPA PER 40 CFR 745.226.
- CARRY LIABILITY INSURANCE TO THE LIMITS REQUIRED BY THE AUTHORITY HAVING JURISDICTION AND ISSUE CERTIFICATE(S) OF INSURANCE AS REQUIRED BY THE HOMEOWNER AND/OR THAT
- CARRY WORKMAN'S COMPENSATION AND DISABILITY INSURANCE AS REQUIRED THE LAW AND ISSUE CERTIFICATE(S) AS REQUIRED BY THE HOMEOWNER AND/OR THE AUTHORITY HAVING

4.0 BUILDING PERMIT

NO PERSON OR ENTITY SHALL COMMENCE, PERFORM, OR CONTINUE ANY WORK THAT MUST CONFORM WITH THE UNIFORM CODE AND/OR ENERGY CODE UNLESS:

- 1. SUCH PERSON OR ENTITY HAS APPLIED TO THE VILLAGE OF OSSINING FOR A BUILDING PERMIT,
- 2. THE VILLAGE OF OSSINING HAS ISSUED A BUILDING PERMIT AUTHORIZING SUCH WORK,
- 3. SUCH BUILDING PERMIT HAS NOT BEEN REVOKED OR SUSPENDED, AND 4. SUCH BUILDING PERMIT HAS NOT EXPIRED.

THE BUILDING PERMIT IS REQUIRED TO BE VISIBLY DISPLAYED AT THE WORKSITE AND TO REMAIN VISIBLE UNTIL THE PROJECT, AND ALL REQUIRED INSPECTIONS, HAVE BEEN COMPLETED.

THE APPROVED DRAWINGS MUST BE KEPT AT THE WORKSITE AND BE AVAILABLE FOR REVIEW AT THE TIME OF ANY REQUIRED INSPECTIONS.

5.0 CONSTRUCTION INSPECTIONS:

IT SHALL BE THE DUTY OF THE HOLDER OF THE BUILDING PERMIT, OR THEIR DULY AUTHORIZED AGENT, TO NOTIFY THE BUILDING OFFICIAL WHEN WORK IS READY FOR INSPECTION:

BUILDING DEPARTMENT OF THE VILLAGE OF OSSINING. 101 ROUTE 9A

OSSINING, NY 10562 TEL: (914) 941-3199

EMAIL: unknown

WEB SITE: www.villageofossining.org/building-department

ANY PERSON OR ENTITY PERFORMING WORK FOR WHICH A BUILDING PERMIT HAS BEEN ISSUED SHALL KEEP SUCH WORK ACCESSIBLE AND EXPOSED UNTIL THE WORK HAS BEEN INSPECTED AND ACCEPTED BY THE AUTHORITY HAVING JURISDICTION, OR ITS AUTHORIZED AGENT, AT EACH ELEMENT OF THE CONSTRUCTION PROCESS THAT IS APPLICABLE TO THE WORK.

BUILDING PERMIT HOLDERS SHALL BE REQUIRED TO NOTIFY THE BUILDING OFFICIAL OF THE VILLAGE OF OSSINING WHEN CONSTRUCTION WORK IS READY FOR INSPECTION.

THE BUILDING OFFICIAL SHALL MAKE THE REQUIRED INSPECTIONS OR SHALL HAVE THE AUTHORITY TO ACCEPT WRITTEN REPORTS OF INSPECTION BY APPROVED AGENCIES OR INDIVIDUALS.

REQUIRED INSPECTIONS FOR THIS PROJECT MAY INCLUDE THE FOLLOWING, AS APPLICABLE, OR AS SPECIFIED IN THE CODE ENFORCEMENT PROGRAM OF THE VILLAGE OF OSSINING:

- WORKSITE PRIOR TO THE ISSUANCE OF A PERMIT
- PLUMBING* ELECTRICAL*
- MECHANICAL
- FRAMING (SUBSEQUENT TO THE INSPECTION & APPROVAL OF PLUMBING, ELECTRICAL & MECHANICAL)
- FIRE RESISTANT CONSTRUCTION
- FIRE RESISTANT PENETRATIONS

AND FOUND SATISFACTORY AS COMPLETED.

ENERGY CODE COMPLIANCE

- A FINAL INSPECTION AFTER ALL WORK AUTHORIZED BY THE BUILDING PERMIT HAS BEEN
- ANY OTHER INSPECTIONS AS REQUIRED BY THE VILLAGE OF OSSINING.
- ALL OF THE ABOVE INSPECTION MAY NOT REQUIRED FOR THIS, OR ANY GIVEN, PROJECT.
- A SCHEDULE OF REQUIRED INSPECTIONS IS AVAILABLE FROM THE BUILDING DEPARTMENT OF THE *THE WORK APPLICABLE TO SOME OF THE ABOVE INSPECTIONS (FOR INSTANCE PLUMBING AND ELECTRICAL) SHALL BE COMPLETED UNDER A SEPARATE PERMIT, FILED BY THE RELEVANT LICENSED

AFTER INSPECTION, THE WORK OR A PORTION THEREOF SHALL BE NOTED AS SATISFACTORY AS COMPLETED, OR THE BUILDING PERMIT HOLDER SHALL BE NOTIFIED AS TO THE MANNER IN WHICH THE WORK FAILS TO COMPLY WITH APPLICABLE CODES, INCLUDING A CITATION OF THE SPECIFIC

CODE PROVISION OR PROVISIONS THAT HAVE NOT BEEN MET. IT SHALL BE THE DUTY OF THE PERMIT HOLDER TO ASCERTAIN THE RESULTS OF REQUIRED

CONSTRUCTION WORK NOT IN COMPLIANCE WITH APPLICABLE CODES SHALL BE REQUIRED TO

REMAIN EXPOSED UNTIL IT HAS BEEN BROUGHT INTO COMPLIANCE WITH THE CODES, RE-INSPECTED,

PER 2020 RESIDENTIAL CODE OF NEW YORK STATE, TABLE 301.2(1) (WIND) EXPOSURE CATEGORY: B CLIMATE ZONE: 4A WIND DESIGN SUBJECT TO DAMAGE FROM WINTER | ICE BARRIER | MEAN FLOOD SNOW LOAD | WIND SPEED | TOPOGRAPHIC | SPECIAL | WINDBORNE | DESIGN DESIGN UNDERLMNT. FREEZING ANNUAL FROST LINE HAZARDS EFFECTS WIND REGION DEBRIS ZONE CATEGORY WEATHERING TEMP REQUIRED INDEX TEMP SEVERE 3'-6" MOD/SEVERE 15 115-120 NO NO YES MINIMAL 615



EXISTING CONDITION CLIENT-PROVIDED IMAGE

MASONRY AND CONCRETE

1. CONCRETE

STRUCTURAL CONCRETE AND CONCRETING PRACTICES SHALL CONFORM WITH THE LATEST EDITION OF ACI 318, BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE, ISSUED AND MAINTAINED BY THE AMERICAN CONCRETE INSTITUTE, AND AS NOTED BELOW.

4000 PSI, NORMAL WEIGHT

4000 PSI, NORMAL WEIGHT

ALL ACI REQUIREMENTS FOR HOT AND COLD WEATHERING CONCRETE MUST BE ADHERED TO.

CONCRETE SHALL HAVE A MINIMUM. COMPRESSIVE STRENGTH AT 28 DAYS AS FOLLOWS UNLESS OTHERWISE NOTED ON THE DRAWINGS: FOUNDATION WALLS, SLAB ON GRADE: 4000 PSI, NORMAL WEIGHT FOOTINGS AND PIERS: 4000 PSI, NORMAL WEIGHT

ALL EXPOSED CONCRETE SHALL HAVE AN AIR ENTRAINING AGENT.

MINIMUM CONCRETE COVER SHALL BE AS FOLLOWS, UNLESS NOTED OTHERWISE ON THE DRAWINGS:

COLUMNS: EXPOSED TO WEATHER OR EARTH: CONCRETE PLACED AGAINST EARTH:

2. REINFORCING STEEL:

CONCRETE ON METAL DECK:

ALL OTHER CONCRETE:

DETAILS SHALL BE IN ACCORDANCE WITH ACI-315, DETAILS AND DETAILING OF CONCRETE REINFORCEMENT UNLESS OTHERWISE NOTED ON THE DRAWINGS.

ALL REINFORCING BARS SHALL CONFORM TO ASTM A615, GRADE 60 UNLESS REQUIRED TO BE WELDED AS SHOWN ON PLANS.

ALL REINFORCING BARS REQUIRED TO BE WELDED SHALL CONFORM TO ASTM A706, GRADE 50.

WELDED WIRE FABRIC SHALL CONFORM TO ASTM A185. SUPPORT WIRE FABRIC WITH CHAIRS OR LIFTS DURING CONCRETE PLACEMENT TO INSURE PROPER POSITION IN SLAB.

ALL REINFORCEMENT SHALL BE SECURELY HELD IN PLACE WHILE PLACING CONCRETE. IF REQUIRED, ADDITIONAL BARS OR STIRRUPS SHALL BE PROVIDED BY THE CONTRACTOR TO FURNISH SUPPORT FOR ALL BARS. REINFORCEMENT SHALL BE SECURED IN THE PROPER LOCATION IN THE FORMS WITH TIE WIRE OR OTHER BAR SUPPORT SYSTEM TO PREVENT DISPLACEMENT DURING THE CONCRETE PLACEMENT OPERATION.

WHERE NOT SPECIFICALLY INDICATED ON THE DRAWINGS, SPLICING & EMBEDMENTS SHALL BE IN ACCORDANCE TABLE R608.5.4(1) LAP SPLICE AND TENSION DEVELOPMENT LENGTHS

STRUCTURAL STEEL

9. PLATES & BARS (UP TO 8"):

10.PLATES & BARS (> 8"):

STRUCTURAL STEEL MEMBERS:

STRUCTURAL STEEL SHAPES SHALL CONFORM TO THE FOLLOWING SPECIFICATIONS: W-SHAPES: ASTM A992 $(F_Y = 50-65 \text{ KSI}, F_U = 65 \text{ KSI})$ 2. M-, S- & HP-SHAPES: ASTM A36 $(F_Y = 36 \text{ KSI}, F_U = 58-80 \text{ KSI})$ 3. CHANNELS (C & MC): ASTM A36 $(F_Y = 36 \text{ KSI}, F_U = 58-80 \text{ KSI})$ 4. ANGLES (L): ASTM A36 $(F_Y = 36 \text{ KSI}, F_U = 58-80 \text{ KSI})$ 5. STRUCTURAL TEES: SAME AS (THEIR) M-, S- & W-SHAPES 6. RECTANGULAR & SQUARE HSS: ASTM A500 GRADE B ($F_Y = 46$ KSI, $F_U = 58$ KSI) ASTM A500 GRADE B ($F_Y = 42$ KSI, $F_U = 58$ KSI) 7. ROUND HSS: ASTM A53 GRADE B ($F_Y = 35$ KSI, $F_U = 60$ k 8. STEEL PIPE:

FASTENING PRODUCTS:

FASTENING PRODUCTS S _L C .FORM) TI TOLLC (i = 12u KSI) 1. H.S. A325 BOLTS; >1"-1 H.S. A325 BOLTS; 1/2" - 1" INC.. TM A325 (F_{IJ} = 105 KSI) 2. H.S. A490 BOLTS; ½" - 1½ ASTM A490 $(F_{IJ} = 150 \text{ KS})$

3. HEAVY-DUTY HEX NUTS; 1/4" - 4": ASTM A563 ASTM F .36 4. HARDENED WASHERS; 1/4" - 4": 5. H.S. A490 BOLTS: 1/2" - 11/2" INC.:

6. THREADED ROD: A TM A36 $(F_Y = 36 \text{ KSI}, T_1 = 1.3 - 8.1.5)$ ASTM F1554 GR. 46 (I) = 36 'SI, J = 58-80 KSI) ANCHOR ROD: PER TABLE D1. TO BLE .1 (MINIMUM $F_U = 70KSI$) 8. FILLER (WELD) MATERIAL 9. WELDING ELECTRODES:

E70XX RODS TO AWS A5.20 (FCA PROCESS) OR AWS A5.18, (GMAW PROCESS) OR AWS A5.1 (SMAW PROCESS)

ASTM A36 (F_Y = 36 VSI, 1 JO-80 I)

ASTM A36 $F_Y = 1$, $F_U = 8 K^c$



EXISTING CONDITION CLIENT-PROVIDED IMAGE

S TEMP (OF DESIGN PROFESSIONAL)

FRNA IL 14' ENERGY CONSERVATIO, C OF 20.

DRAWING NAME

COVER SHEET

STRUCTURAL

VINCENT COAKLEY, P.F.

1. THESE PLANS HAVE BEEN PRED ...E. IN CON. DI MA. CE WITH THE 2020 RESIDENTIAL CODE OF

CO' FOR MAJOE VILLET E ENERGY CONSERVATION CONSTRUCTION CODE OF NEW YORK STATE 2020

LIST OF DRAWINGS

DATE

06.26.2025


07.17.2025

REVISION

07.17.2025

2. TO THE LOT OF MY, NOWLY DGE AND PROFESSIONAL JUDGEMENT, THESE PLANS ARE IN

NEW YORK STATE (INTER) ... DNAL RES DL 'TI' _ CODE 2018 WITH AMENDMENTS).

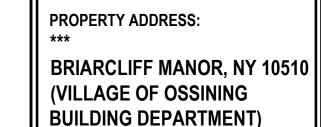

5

EMAIL: ***

06.26.2025 PRELIMINARY 07.17.2025 FOR PERMIT

PROJECT NAME: RETROFIT FLOOR STRUCTURE

DRAWING NAME: **COVER SHEET**


DRAWING NUMBER: C-01

DATE: 06.26.2025 SCALE:

AS NOTED

THIS DRAWING IS VALID FOR CONSTRUCTION IF (AND ONLY IF) A PERMIT IS ISSUED, BASED ON THIS DRAWING, BY THE VILLAGE OF **OSSINING.**

PERMIT SUBMISSION REQUIREMENTS FOR THE VILLAGE OF OSSINING INCLUDE ----. CHECK TO CONFIRM EXACT REQUIREMENTS WITH THE BUILDING DEPARTMENT, TEL: (914) 941-3199.

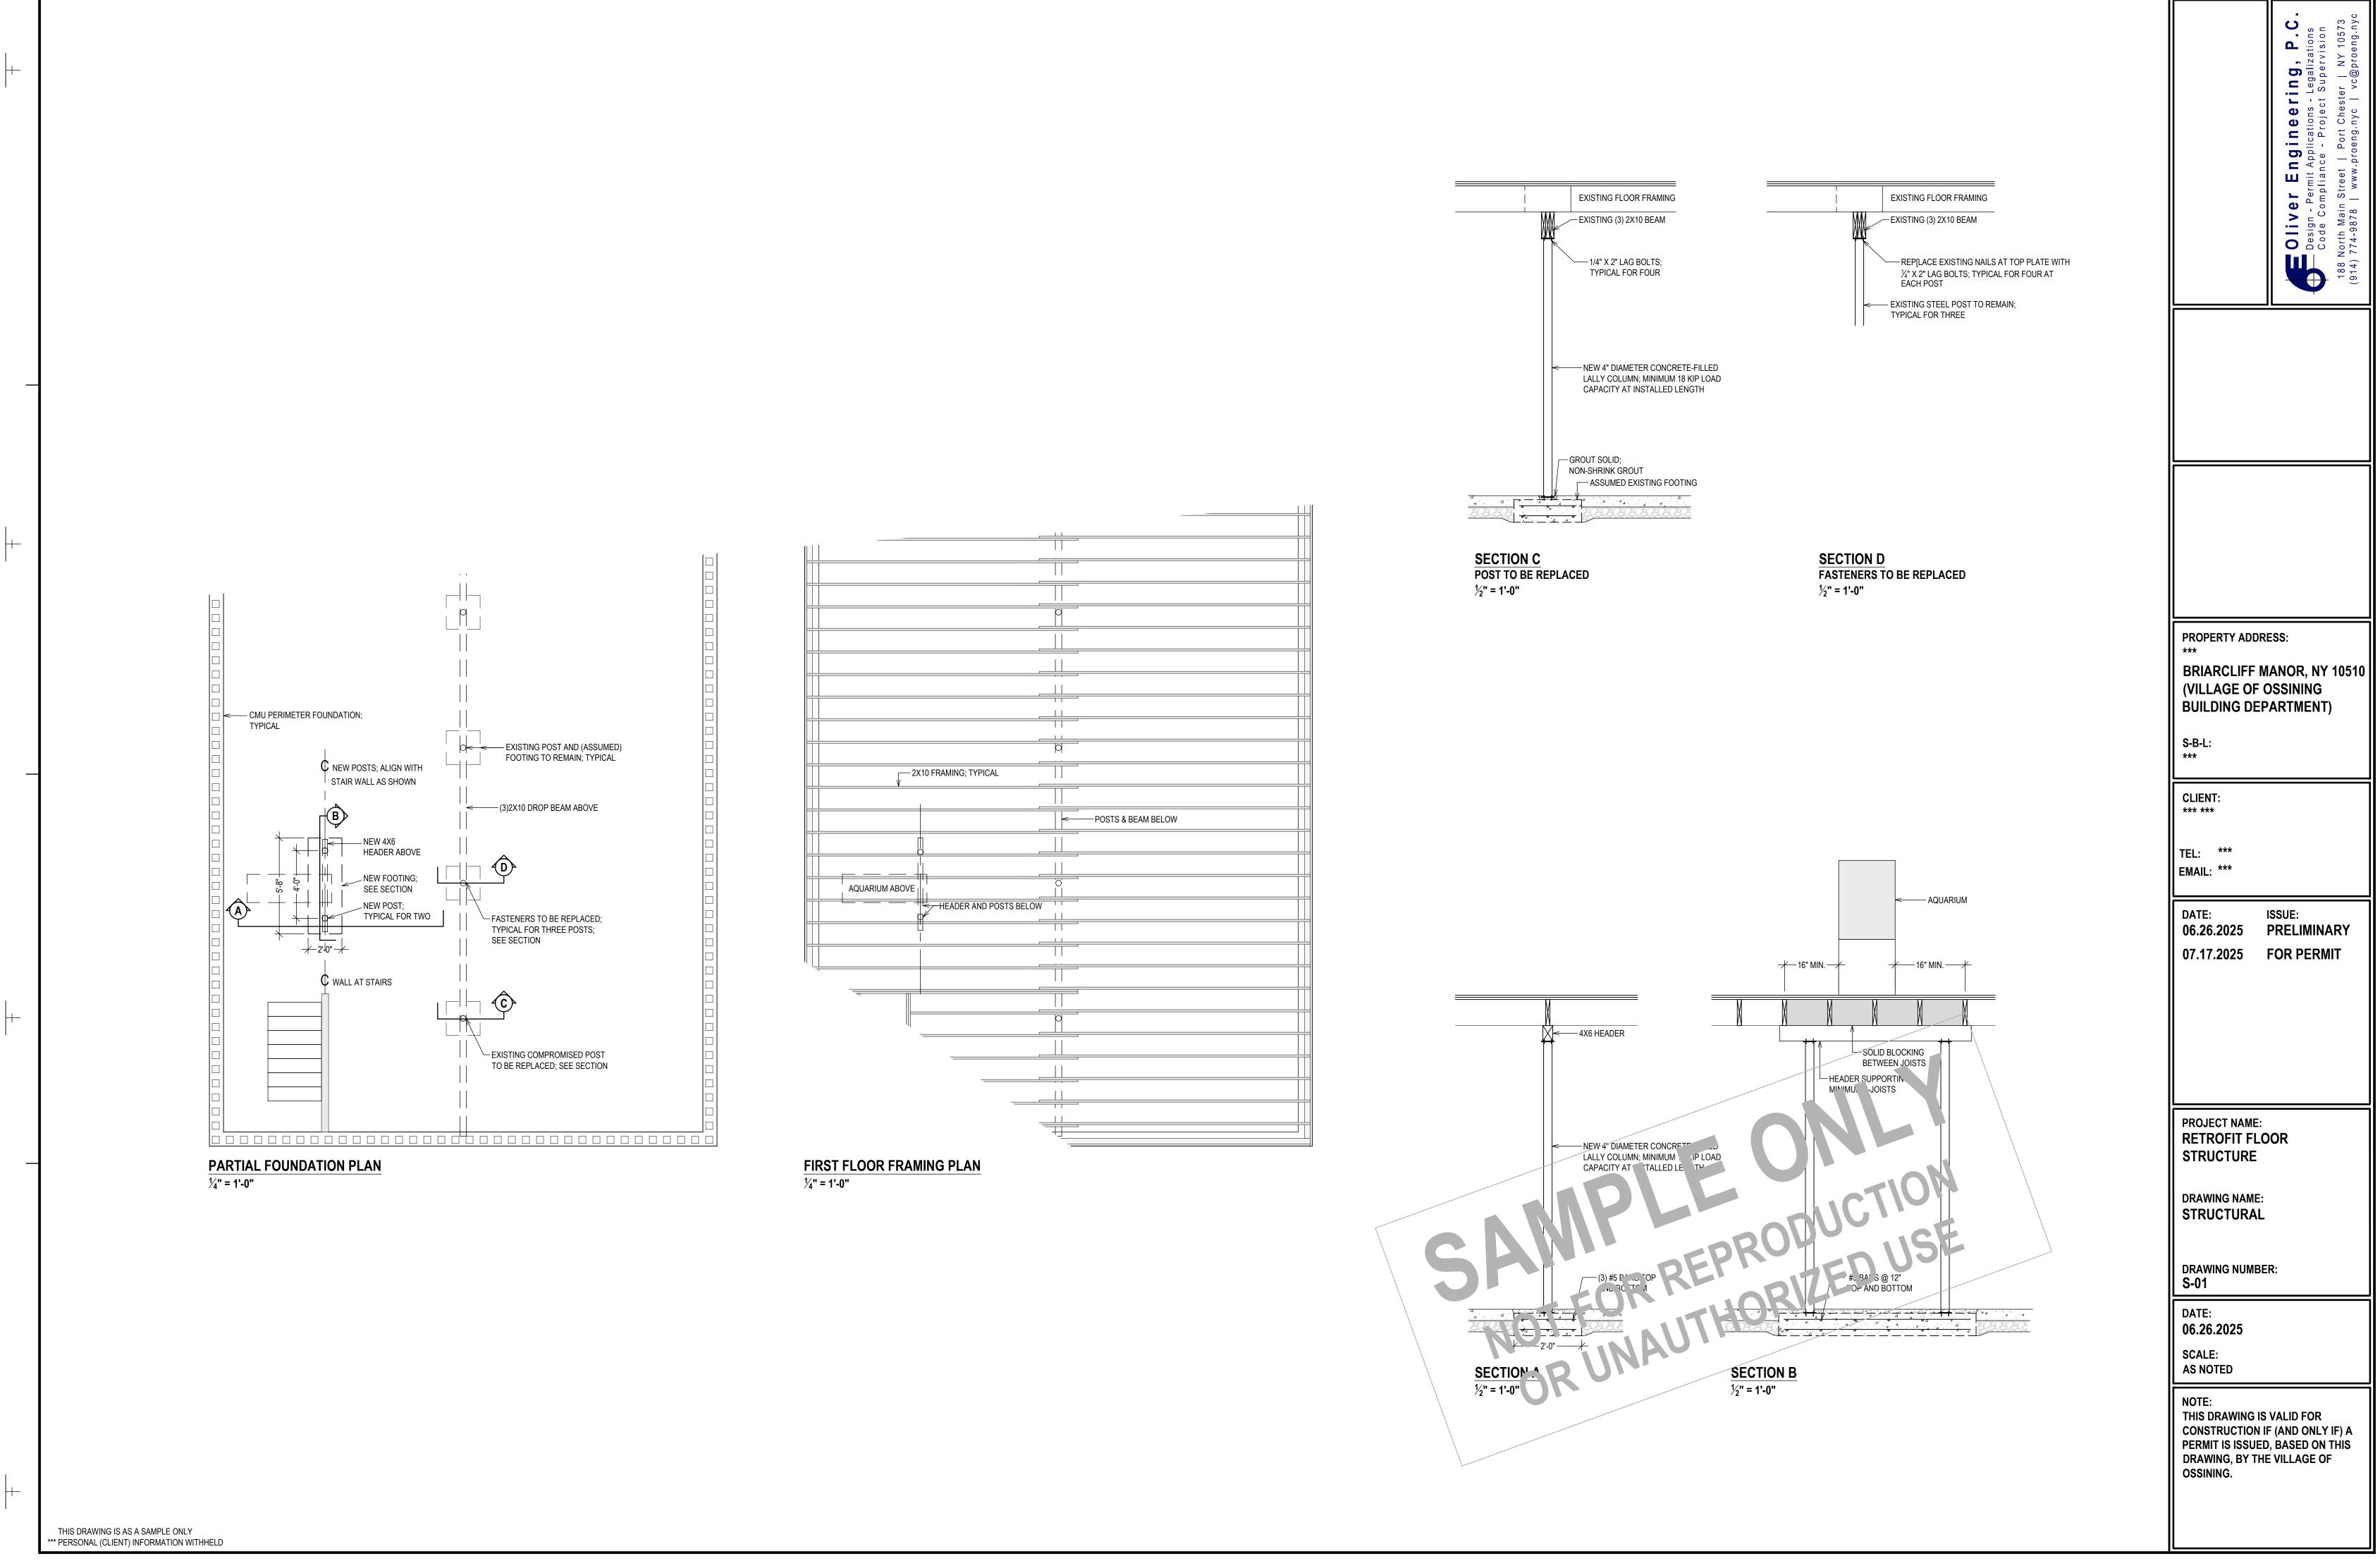

DO NOT SCALE DRAWINGS | THIS DRAWING IS SCALED TO PRINT ON AN ARCH D (24" X 36") SHEET